lambert&fils



DORVAL 04

Based on SCMP DESIGN OFFICE's original pendant prototype Dorval 01, this collection is layered in history, a subtle interplay between contemporary and vintage industrial design. Drawing equal inspiration from airport runway lights and the classic Motobecane french moped, the result is a light both confrontational and intriguing—one which poses an immediate invitation to play.

type: wall, hardwire (HW) and softwire version (SW)

construction: powder coated or polished aluminum body and head

clear prismatic PMMA lens

polyester (SW)

specifications: source: LED array, integrated

power consumption: HW: 7.6W, SW: 5W

color temperature: 3000K 2700K

> dim to warm 3000k to 2200k dim to warm 2700k to 2200k

lumen output: 3000K - HW: 578 lm, SW: 402 lm

2700K - HW: 559 lm, SW: 389 lm

colour rendering index: ≥90 CRI colour consistency: 3 SDCM expected lifetime: ≥50 000h

control: HW: 120/277VAC On/Off, 0-10V or Phase Dimming (120V only)

1.3" / 3.3 cm

220-240VAC On/Off, Phase Dimming, DALI


SW: 90-264VAC Plug-in Driver, integrated touch dimmer

cord length: 96" / 244 cm (SW)


certifications: (E Wolls & IP20

warranty: 2 years

HARDWIRE

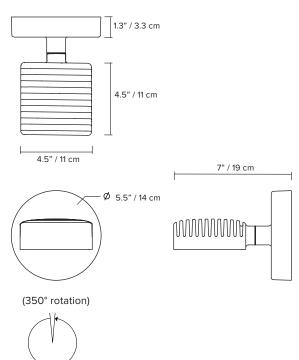

SOFTWIRE

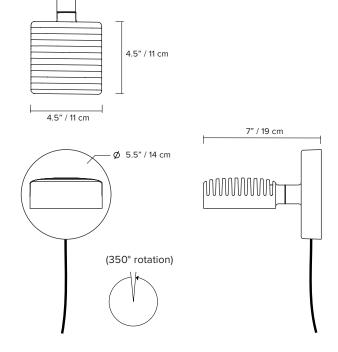

lambert&fils

ORDER GUIDE: SKU

COLLECTION		MODEL	INSTALLATION		FINISH		CORD (SW only)		COLOUR TEMPERATURE (CCT)		DIMMING (HW only)	
DOR	dorval	04	HW	hardwire	вк	black	вк	black	WL	warm light (2700K)	ZT	0-10V dimming
			sw	softwire	WH	white	WH	white	NL	neutral light (3000K)	PH	phase dimming
					МВ	midnight blue	МВ	midnight blue	D27	dim to warm (2700K-2200K)	DA	DALI
					LB	light blue	LB	light blue	D30	dim to warm (3000K-2200K)		
					BG	beige	BG	beige	ССТ	other CCT available		
					AL	aluminium	AL	aluminium	1	upon request *		
DOR		04	BK		BK		BK		WL		ZT	

⁼ DOR04HWBKWLZT example

FINISH



black





d

textured

blue

textured textured midnight light blue



textured

beige



polished aluminum

TOUCH DIMMER CONTROL


The luminaire's body is used as touch dimmer


- single touch: lamp on/off
- long touch: brightness up/down

NOTES:

- must be installed by an electrician (HW only)
- LED may only be changed by Lambert & Fils or other authorized personnel
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on our website for cleaning instructions

HARDWIRE





^{*} Specific CCT selection only available in 100K increments, from 2200K to 4000K inclusively. Not available with Dim-to-Warm feature.