









## LAURENT 10


The Laurent Collection distills the milk globe to its essential relationship between circle and sphere. A series of thin forms compliment the Laurent globes—forms that carve through space, moving between line, surface, and volume. These forms combine in endless patterns, making it possible for an installation of Laurent lamps to inhabit any space with subtlety and quiet strength.

|                        |   |
|------------------------|---|
| <b>type:</b>           | pendant   |
| <b>construction:</b>   | handblown opaline glass globe<br>powder coated aluminium or brass hardware<br>polyester cord  |
| <b>specifications:</b> | source: LED lamp provided (G9 base)<br>power consumption: 4,5W<br>lumen output: 319lm<br>colour temperature: 2700K included<br>* 3000K available upon request<br>colour rendering index: 80 CRI standard<br>* ≥ 90 CRI upon request<br>expected lifetime: 25 000h   |
| <b>control:</b>        | refer to our recommended list of dimmer models  |
| <b>cord length:</b>    | 84" / 213 cm  |
| <b>weight:</b>         | 3.1 lb / 1.4 kg   |
| <b>certifications:</b> |     IP20 |
| <b>warranty:</b>       | 2 years   |


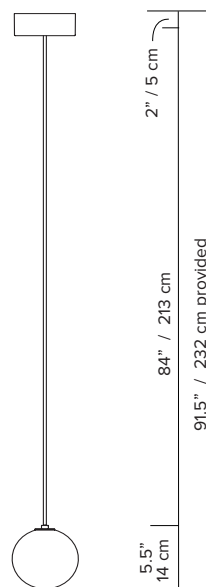


## ORDER GUIDE: SKU


| COLLECTION  | MODEL | CORD SYSTEM   | CANOPY  |
|-------------|-------|---|---|
| LRT Laurent | 10    | <b>BK</b> black<br><b>BR</b> brass<br><b>BE</b> blue<br><b>BU</b> burgundy<br><b>BG</b> beige | <b>BK</b> black<br><b>BE</b> blue<br><b>BU</b> burgundy<br><b>TU</b> turquoise<br><b>WH</b> white |
| LRT         | 10    | BK  | BK = LRT10BKBK<br>example   |

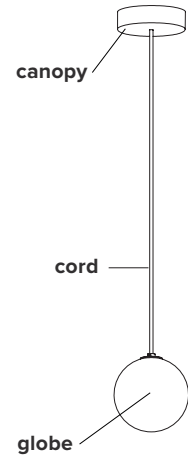

### CORD SYSTEM FINISH globe holders & cords

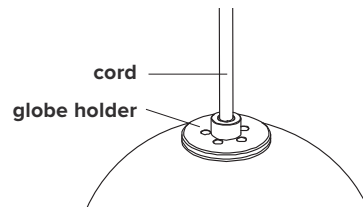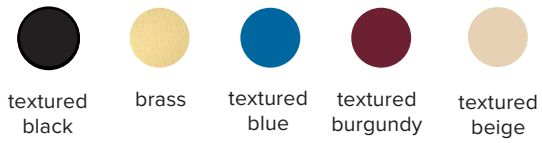

### CANOPY

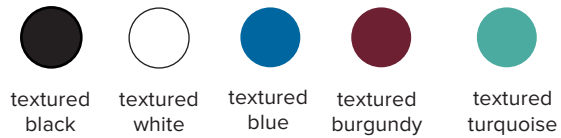

## DIMMER SPECIFICATIONS

### DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.


| DIMMER BRAND     | MODEL NUMBER   | MIN LEVEL | MAX LEVEL | FLICKERING | OVERALL QUOTE |
|------------------|----------------|-----------|-----------|------------|---------------|
| LUTRON - MAESTRO | MAELV-600      | 0%        | 100%      | 0%-10%     | good          |
| LUTRON - SKYLARK | SELV-300P      | 0%        | 100%      | no         | very good     |
| LUTRON - SKYLARK | SELV-303P      | 0%        | 100%      | no         | very good     |
| LUTRON - SKYLARK | CTELV-303P     | 0%        | 100%      | no         | very good     |
| LUTRON - DIVA    | DVELV-300P     | 0%        | 100%      | no         | very good     |
| LEGRAND - ADORNE | TRUE UNIVERSAL | 30%       | 100%      | no         | good          |

### DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

| DIMMER BRAND    | MODEL NUMBER | MIN LEVEL | MAX LEVEL | FLICKERING | OVERALL QUOTE |
|-----------------|--------------|-----------|-----------|------------|---------------|
| VARILIGHT       | V-PRO        | 2%        | 100%      | no         | very good     |
| LEGRAND - NILOÉ | 3 996 35     | 15%       | 87%       | no         | good          |
| NIKO            | 310-0280X    | 5%        | 94%       | no         | very good     |
| NIKO            | 310-0190X    | 1%        | 100%      | no         | very good     |

\*Other dimmers can yield good results and we recommend conducting your own test before final installation.

## EU ENERGY LABEL

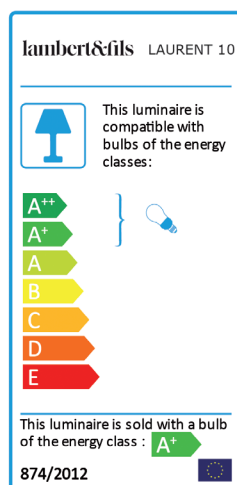

### NOTES:

- must be installed by an electrician
- ceiling anchors not meant for slanted ceilings (available upon request)
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on website for cleaning instructions