








## MILE 03

A collaboration between Lambert & Fils and Guillaume Sasseville, Mile offers a variation on the linear suspension, pared down to its simplest, asymmetrical expression, with two lines floating in surprising equilibrium. Direct and indirect light are separated by a 90° pivot, thus marking out space with light. A play on contrasts, Mile is part art installation and part utilitarian light. The use of linear LED technology and the cords clamped into the structure add to the weightless, almost levitating feel of the lamp.

- type:** suspension
- construction:** powder coated or polished aluminum body  
powder coated or polished steel anchors  
powder coated steel canopy  
frosted acrylic diffuser  
polyester cord
- specifications:** source: LED array, integrated  
power consumption: 31W (120V), 27W (230V)  
lumen output: LED 2700K - 2329lm (120V), 2038lm (230V)  
LED 3000K - 2400lm (120V), 2100lm (230V)  
light distribution: 26% Up, 74% Down  
colour rendering index: ≥90 CRI  
colour consistency: 3 SDCM  
expected lifetime: ≥50 000h
- control:** 120/277V on/off, 0-10V or phase dimming (120V only)  
220-240V: On/Off, Phase Dimming, DALI  
refer to our recommended list of dimmer models
- cord length:** mains/line cord - 120" / 304 cm  
non-electrical cord - 96" / 244 cm
- weight:** 5.5 lb / 2.5 kg
- certifications:**     IP20
- warranty:** 2 years

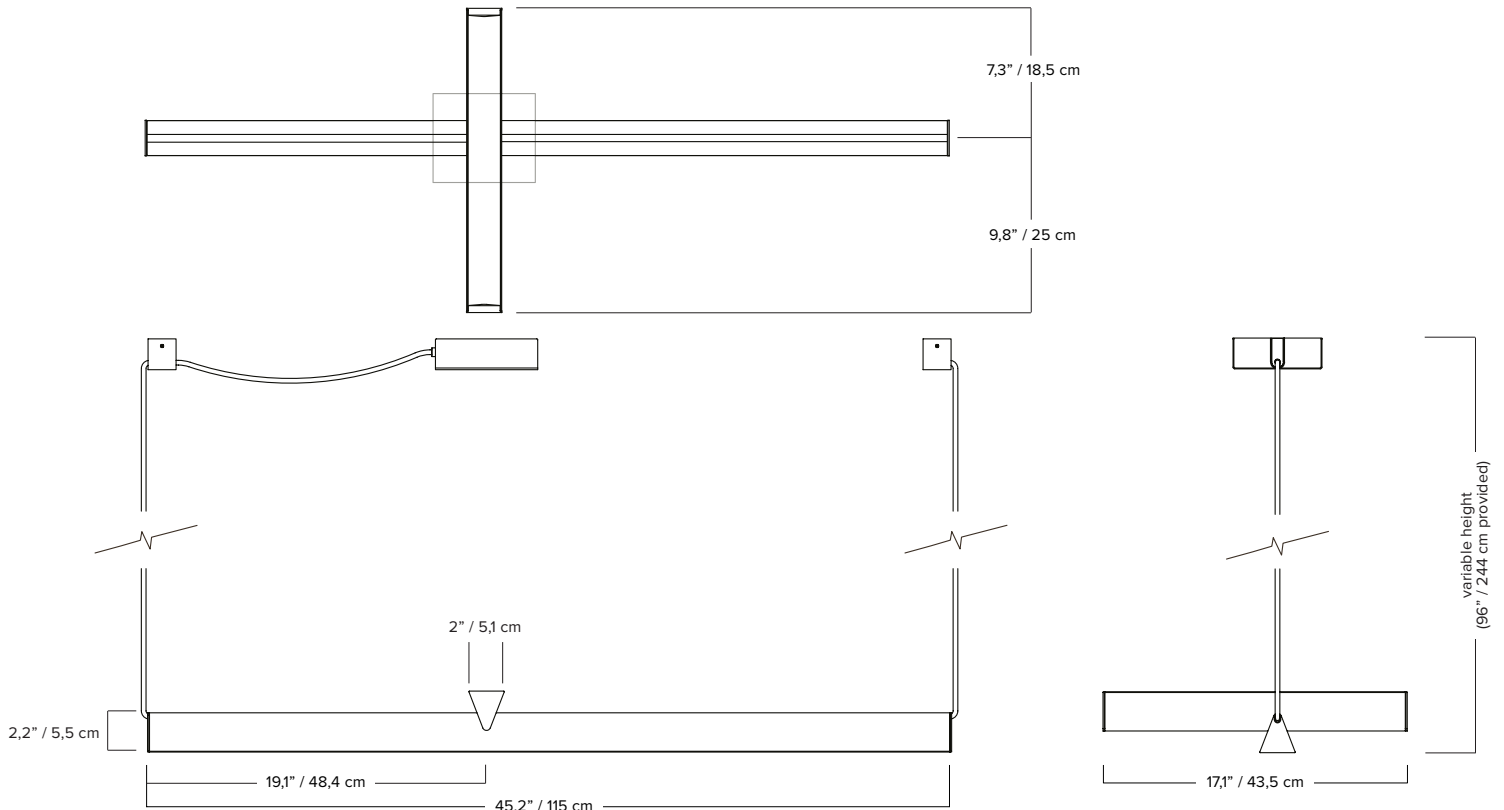

\*dimensions are approximate and may vary slightly

## ORDER GUIDE: SKU

COLLECTION	MODEL	BODY, CORD AND ANCHOR		CANOPY		COLOUR TEMPERATURE (CCT)		DIMMING	
MIL	Mile	03 LV	<b>BK</b> black	<b>BK</b> black	<b>WL</b> warm light (2700K)	<b>ZT</b> 0-10V dimming (120V only)			
			<b>BG</b> beige	<b>BG</b> beige	<b>NL</b> neutral light (3000K)	<b>PH</b> phase dimming			
			<b>BU</b> burgundy	<b>BU</b> burgundy	<b>D27</b> dim to warm (2700K to 2200K)	<b>DA</b> DALI (230V only)			
			<b>GN</b> green	<b>GN</b> green	<b>D30</b> dim to warm (3000K to 2200K)				
			<b>WH</b> white	<b>WH</b> white	<b>CCT</b> other CCT available upon request*				
			<b>AL</b> aluminum						
<b>MIL</b>	<b>03 LV</b>	<b>BK</b>	<b>BK</b>	<b>WL</b>	<b>ZT</b>	<b>= MIL03LVBKKBKWLZT</b> example			


\* Specific CCT selection only available in 100K increments, from 2200K to 4000K inclusively. Not available with Dim-to-Warm feature.

### FINISH



### NOTES

- must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on website for cleaning instructions

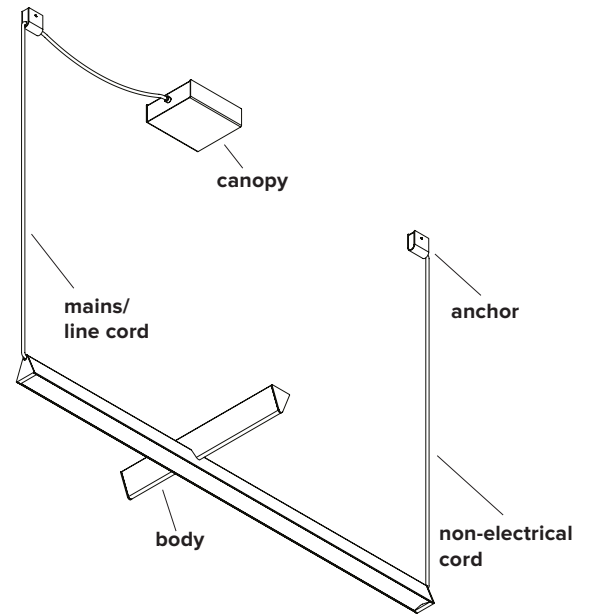

## DIMMER SPECIFICATIONS

### TESTED DIMMER COMPATIBILITY LIST - 120V\*

Phase cut dimming (leading edge or trailing edge\*\*)

Dimmer brand	Model	Max level	Min level	Dimming Protocol
Cooper	SLC03P	98%	1%	Phase Cut
Leviton	IPE04	99%	10%	Phase Cut
Leviton	VPE06	98%	14%	Phase Cut
Lightolier	ZP260QEW	98%	11%	Phase Cut
Lutron	DVELV303P	98%	11%	Phase Cut
Lutron	MAELV600	98%	18%	Phase Cut
Lutron	FAELV500	99%	17%	Phase Cut
Lutron	SELV300P	98%	11%	Phase Cut
Lutron	TGCL-153P	98%	9%	Phase Cut

### TESTED DIMMER COMPATIBILITY LIST - 230V\*

Phase cut dimming (leading edge or trailing edge\*\*)

Dimmer brand	Model	Max level	Min level	Dimming Protocol
Clipsal	32E450TM	100%	25%	Phase Cut
Clipsal	32E450UDM	100%	31%	Phase Cut

Some dimmers require a minimum load, check specifications.

\*Other dimmers that specify LED lamp compatibility may operate without issue. We recommend conducting your own test before final installation.

\*\*Leading edge is also known as TRIAC or Forward Phase. Trailing edge is also known as ELV or Reverse Phase.

## EU ENERGY LABEL

