







HUTCHISON 04


Hutchison is the thoughtful study of soft curves and hard lines—a rivalry of vertical and horizontal forces and a play of scale and repetition. Alone, it self-defines as a frank, decorative pendant light. In multiples, it evokes the iconic patterns of Middle Eastern archways and Roman terracotta roofs.

- type:** suspension
- construction:** powder coated or polished aluminum body
PMMA frosted diffuser
polyester cord
- specifications:** source: LED array, integrated
power consumption: 32W
lumen output: 2700K- 2619lm
3000K- 2817lm
colour rendering index: ≥ 90 CRI
colour consistency: 3 SDCM
expected lifetime: $\geq 50\ 000$ h
- control:** 120/277V on/off, 0-10V or phase dimming (120V only)
220-240V on/off or phase dimming
refer to our recommended list of dimmer models
- cord length:** 108" / 275 cm
- weight:** 6.8lb / 3.2kg
- certifications:**     IP20
- warranty:** 2 years

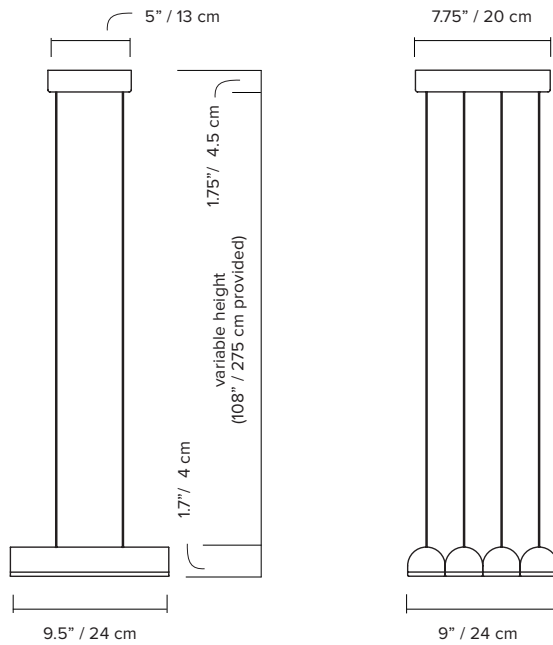

ORDER GUIDE: SKU

COLLECTION	MODEL	BODY	CORD	CANOPY
HUT hutchison	04	BK black	BK black	BK black
		WH white	WH white	WH white
		TC terracota		TC terracota
		BG beige		BG beige
		AL aluminium		
HUT	04	BK	BK	BK

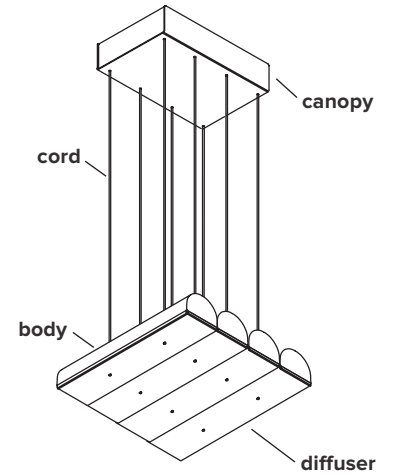

COLOUR TEMPERATURE (CCT)	DIMMING
WL warm light (2700K)	ZT 0-10V dimming
NL neutral light (3000K)	PH phase dimming
D27 dim to warm (2700K to 2200K)	
D30 dim to warm (3000K to 2200K)	
CCT other CCT available upon request *	
WL	ZT = HUT04BK BK BK WL ZT

example

* Specific CCT selection only available in 100K increments, from 2200K to 4000K inclusively. Not available with Dim-to-Warm feature.

FINISH



textured black



textured white



textured terracotta



textured beige



polished aluminum

CORD



black



white

NOTES:

- must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- offset option available upon request
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on website for cleaning instructions

DIMMER SPECIFICATIONS

TESTED DIMMER COMPATIBILITY LIST - 120V*

Compatible with 0-10V, Phase dimming (leading edge or trailing edge**)

Dimmer brand	Model	Dimmer protocol	Min level	Max level
Lutron	TGCL-153P	Phase dimming	9%	98%
Leviton	VPE06	Phase dimming	14%	98%
Lutron	DVELV303P	Phase dimming	11%	98%
Lutron	SELV300P	Phase dimming	11%	98%
Lightolier	ZP260QEW	Phase dimming	11%	98%
Lutron	FAELV500	Phase dimming	17%	99%
Lutron	MAELV600	Phase dimming	18%	98%

TESTED DIMMER COMPATIBILITY LIST - 230V*

Compatible with 0-10V, Phase dimming (trailing edge only**)

Dimmer brand	Model	Dimmer protocol	Min level	Max level
Clipsal	32E450UDM	Phase dimming	31%	100%
Clipsal	32E450TM	Phase dimming	25%	100%

Some dimmers require a minimum load, check specifications.

*Other dimmers can yield good results and we recommend conducting your own test before final installation

**Leading edge is also known as TRIAC or Forward Phase. Trailing edge is also known as ELV or Reverse Phase.

EU ENERGY LABEL

